



ELPAC FXA350 SERIES CLASS I

250 Watt
ITE Open Frame Power Supply

- Safety Approval – IEC62368-1 Class I
- High Efficiency
- Up to 350W with Forced Air
- +5V Standby & Fan Power
- High Power Density 5.83W/in³
- Lifetime Expectation >5 years
- Grounded Output
- 5-Year Limited Warranty



INPUT	
Input Voltage	85 – 264VAC (100 – 240VAC Nominal)
Input Frequency	47 – 63Hz (50-60Hz Rated)
Input Current	5.0A-2.0A rms
Inrush Current	<37A at 230VAC cold start
Power Factor	>0.97
Zero Load Power	<0.75W
Touch Leakage Current	<200µA @ 132VAC @ 60Hz
	<300µA @ 264VAC @ 60Hz

OUTPUT	
Output Voltage	See Table
Total Regulation	±5%
Minimum Load	No minimum load required
Start-Up Delay	<1s
Hold-Up Time	>20ms at any input voltage of full load
Ripple & Noise	<1% pk-pk **
Over Voltage Protection	110 – 135%
Over Temperature Protection	Active - Recoverable; Passive - Non recoverable
Over Current Protection	120 – 180%
Short Circuit Protection	Shutdown, auto-restart (hiccup mode)

Notes

**Ripple and noise measured with 20MHz bandwidth; 10µF tantalum capacitor in parallel with a 0.1µF ceramic capacitor.

Model Number	Output Voltage	Output Current	Peak Current ¹	Total Regulation ²	Typical Efficiency ³
FXA350012A	12.0V	20.8A	29.1A	±5%	88%
FXA350015A	15.0V	16.6A	23.2A	±5%	88%
FXA350024A	24.0V	10.4A	14.5A	±5%	88%
FXA350028A	28.0V	8.9A	12.5A	±5%	89%

Notes

1) Maximum peak load (350W) lasting 500ms with a maximum 10% duty cycle, Sustained output current (350W) with minimum 150 LFM.

2) Includes initial setting, line regulation, load regulation, and thermal drift.

3) Typical Efficiency at Full Load 115 VAC.

ELPAC FXA350 SERIES CLASS I

250 Watt
ITE Open Frame Power Supply



General	
Efficiency	Avg. Efficiency 88.0% @ 115VAC; Avg. Efficiency 90.0% @ 230VAC;
MTBF	min. 200,000 hours, SR-332 issue 3
Size	8.00" (203.2mm) x 5.00" (127mm) x 1.50" (38.1mm)
Weight	2.1 LBS (0.95 Kg)
Power Density	5.83W/in ³
Altitude (Operating/ Non Operating)	5000M


Environmental	
Operating Temperature	0–50°C (Full load to 50°C, derate linearly to 50% load at 70°C)
Storage Temperature	-40°C to +85°C
Relative Humidity	5-95%, non-condensing
Cooling	Natural Convection (250W) or Forced Air (350W)
Vibration	Unites meet MIL-STD-810G Figure 514.6C-1 category 4

EMC & Safety	
Emissions	FCC class B, EN55035:2017+A11:2020 EN55032:2015+A11:2020
Immunity	EN61000-4-2, -3, -4, -5, -6, -11
Certified by TUV to the following:	cTUVus
	UL62368-1:2014
	CAN/CSA-22.2 No.62368-1-14
	CB per IEC 62368-1:2014
	CE marked to LVD and CE EMC

Input Configuration (H1)	
Connection on Power Supply Body	JITE P/N BTB5551003 Barrier Strip, M3 screws
Pin 1	AC Line
Pin 2	AC neutral
Pin 3	Ground

Signal Configuration (H2)	
Connector	AMP P/N 6404568 or equivalent
Mating Connector	AMP P/N 6404408 or equivalent
Pin 1	DC-Good (TTL high when DC is within regulation)
Pin 2	AC-Fail (TTL high when AC is present; min. 8ms warning before loss of DC output)
Pin 3	Remote On/Off (Connect to Pin 7 (Rtn) to enable power supply)
Pin 4	+Sense (Must be connected to output, either at H4 connector, or at point of load. Will compensate for up to 500mV cable drop)
Pin 5	-Sense
Pin 6	No connection
Pin 7	Return for Remote on/off and +5V Standby
Pin 8	Return to Pin 7 for +5V @ 1.0A Standby output

Output Configuration (H4)	
Connector (PSU side)	JITE P/N BTB5551004 Barrier Strip, M3 screws
Pin 1	+V1
Pin 2	+V1
Pin 3	Return
Pin 4	Return

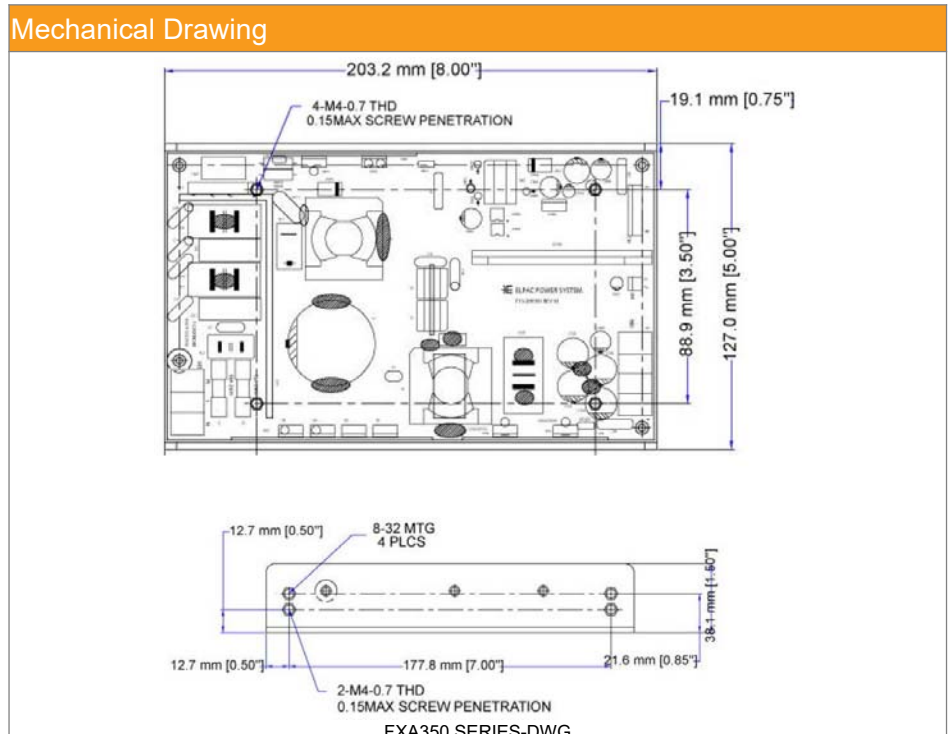

Fan Configuration (H3)	
Connector (PSU side)	AMP P/N 6404568 or equivalent
Mating Connection	AMP P/N 6404408 or equivalent
Pin 1	+V (Fan output will adjust from +5V to +12V depending on ambient temperature) maximum 0.35A
Pin 2	-V