

# S-24V90-TRX

PROTRXion™ Series | Technical Data Sheet

**inVENTUS**  
POWER



**Certified to global functional safety standards**



**Fast charging**  
within 2 hours with leading charger OEMs



**Long shelf life performance**  
24 months from shipment



**Scalable to increase runtime**



**Automotive grade cells**  
from top tier manufacturers



- **Patented virtual BMS**  
Single battery platform with advanced modular network
- **UL2271** Certified off-road safety for low speed electric vehicles
- **Universal Communication Protocol (CANopen)**
- **State-of-the-art module balancing technology**
- **Soft start control**  
(System pre-charge)
- **Supports regenerative braking**


## Electrical Specifications

Cell Chemistry	LiFePO4
Pack Voltage (Nom/Max)	25.6V / 28.0V
Pack Energy	2.3kWh (90Ah)**
Specific Energy	113Wh/kg
Continuous Power	3.8kW (150A)
Recommended Charge CCCV	45A / 28.0V
Peak Power (<10sec)	5.12kW (200A)
Cycle Life (Based on cell data @ 25°C)	3,000 @ 80% DoD
Scalability	Up to 540Ah

## Operational Specifications

Charge Temp	0°C to 55°C
Discharge Temp	-20°C to 55°C
Storage Temp	-20°C to 60°C
Humidity (Operating)	5% to 95%
Humidity (Storage)	<70%

## Mechanical Specifications

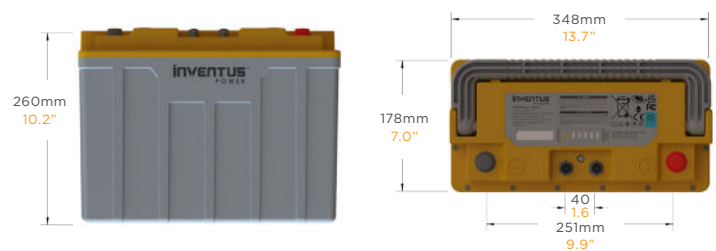

Terminal Type (ISO)	M8 (Neg), M10 (Pos)
Terminal Torque (Nm)	17 ± 1 (Neg), 22 ± 1 (Pos)
Weight	20.4kg (45.0lbs)
Installation Orientation	Horizontal / Vertical
Ingress Protection Rating	IP67*
Case Flammability Rating	Flame Retardant UL94 V-0

## Certifications

- UL1642 (Cell)
- UL2271 (Pack)
- IEC62133 (Cell/Pack)
- IEC62619
- FCC Class B
- CE
- UN38.3
- IEC60730 Class B

\*IP65 if communication ports left unmated.

\*\*Usable capacity will depend on charge voltage, the depth of discharge, age, and other environmental conditions.

## Market Applications



Professional  
Cleaning



Aerial Work Platform



Material Handling



Robotics


# S-24V90-TRX

PROTRXion™ Series | Technical Data Sheet




## Capacity vs. Discharge Rate

Test condition: Ambient Temperature

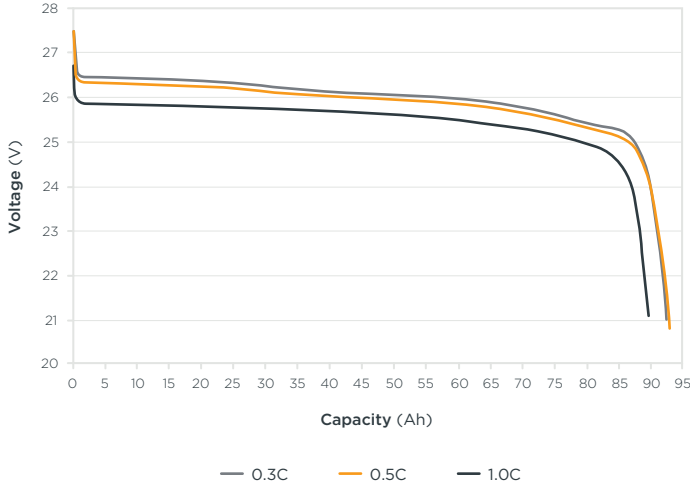


## Cycle Life

Based on cell data: charge 0.5C, discharge 1C at 25°C & 80% DoD

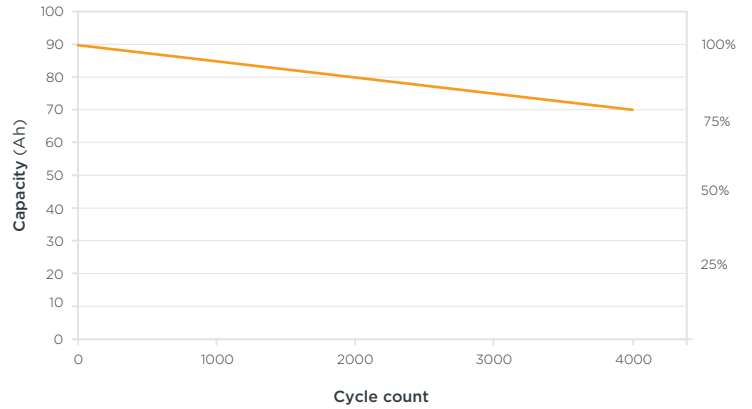


## Voltage and Capacity vs. Temperature

Discharge current: 1.0C

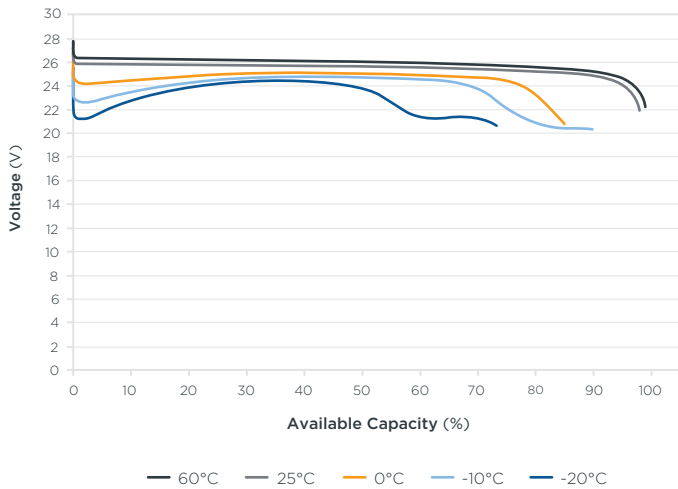

## Charging Performance

Test condition: Ambient Temperature

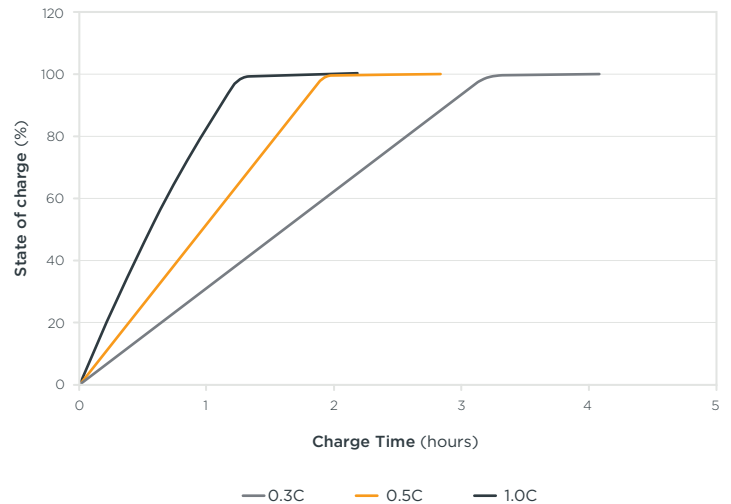

Inventus Power reserves the right to make adjustments to this document at any time, without notice or obligation. All data in this publication is for reference use only. Models may vary from shown.



Request more information

[inventuspower.com](http://inventuspower.com) | [info@inventuspower.com](mailto:info@inventuspower.com) | +1 877.423.4242