

# M-24V20-U1

U1LiFePRO™ Series | Data Sheet

**inVENTUS**  
POWER



**Certified to global safety standards**



**Fast charging**  
within 2 hours with leading charger OEMs



**Long shelf life performance**  
with shutdown mode



**Scalable to increase runtime**



**Automotive grade cells**  
from top tier manufacturers



- **Patented virtual BMS**  
Single battery platform with advanced modular network
- **UL2054 Shock & Vibration + Thermal Propagation Mitigation**
- **Universal Communication Protocol (CANopen/RS485)**
- **State-of-the-art module balancing technology**
- **Soft start control**  
(System pre-charge)
- **Supports regenerative braking**


## Electrical Specifications

Cell Chemistry	LiFePO4
Pack Voltage (Nom/Max)	25.6V / 28.0V
Pack Energy	502Wh (20Ah)
Specific Energy	88Wh/kg*
Continuous Power	0.77kW / 30A
Recommended Charge CCCV	10A / 28.0V
Peak Power (<10sec)	1.54kW (60A)
Cycle Life (Based on cell data @ 25°C)	3,000 @ 80% DoD
Scalability	Up to 200Ah

## Operational Specifications

Charge Temp	0°C to 55°C
Discharge Temp	-20°C to 60°C
Storage Temp	-20°C to 60°C
Humidity (Operating)	5% to 95%
Humidity (Storage)	<70%

## Mechanical Specifications

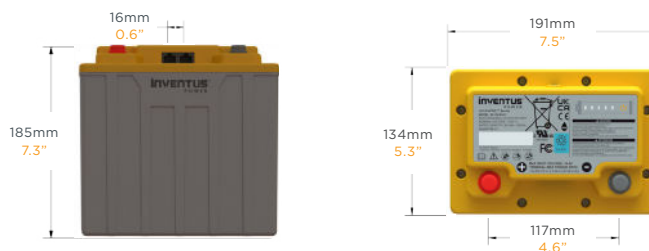

BCI Size	U1
Terminal Type (ISO)	M6
Terminal Torque (Nm)	3.4 ± 0.5 Nm
Weight	5.7kg (12.6lbs)
Installation Orientation	Horizontal / Vertical
Ingress Protection Rating	IP56
Case Flammability Rating	Flame Retardant UL94 V-0

## Certifications

- UL1642 (Cell)
- UL2054 (Pack)
- IEC62133 (Cell/Pack)
- FCC Class B
- CE
- UN38.3

\*Usable capacity will depend on charge voltage, the depth of discharge, age, and other environmental conditions.

## Market Applications



Professional Cleaning



Medical Carts



E-Mobility




Material Handling



Robotics


### Capacity vs. Discharge Rate

Test condition: Ambient Temperature

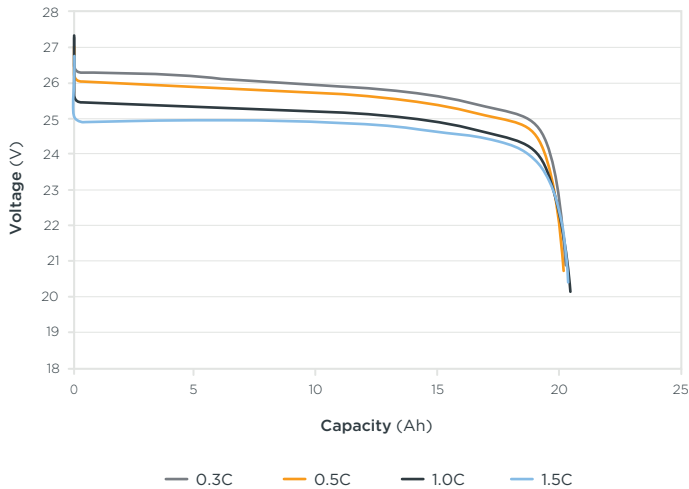


### Cycle Life

Based on cell data: charge 0.5C, discharge 1C at 25°C & 80% DoD

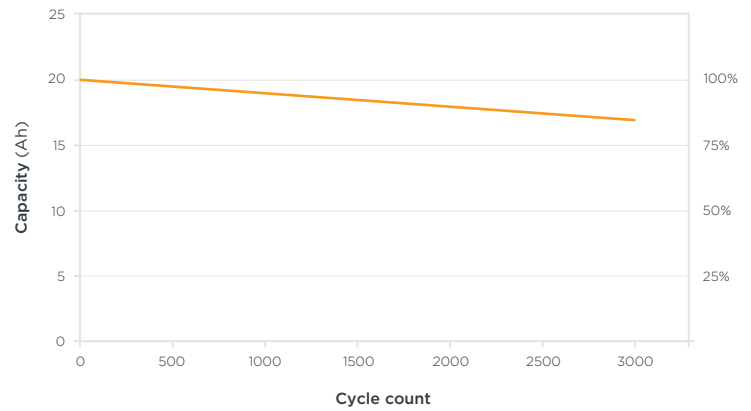


### Voltage and Capacity vs. Temperature

Discharge current: 1.0C

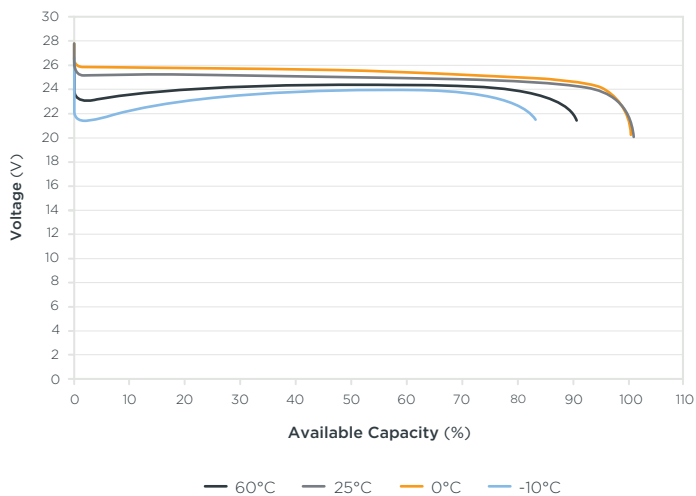

### Charging Performance

Test condition: Ambient Temperature

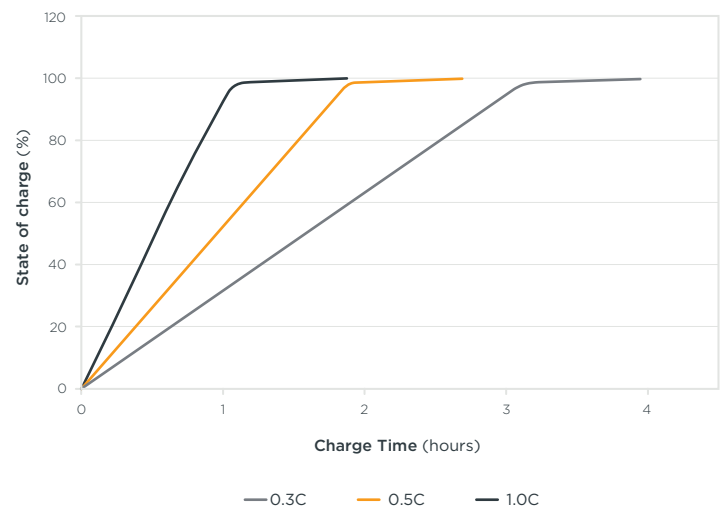

Inventus Power reserves the right to make adjustments to this document at any time, without notice or obligation. All data in this publication is for reference use only. Models may vary from shown.



**Request  
more Information**

[inventuspower.com](http://inventuspower.com) | [info@inventuspower.com](mailto:info@inventuspower.com) | +1 877.423.4242